


Innovative lightweight honeycomb cores, panels, composites, adhesives, process equipment & consultancy

AluLite™ XPS

Lightweight XPS Foam Core Panel

ALI/XPS/ALI

- Very Lightweight
- Rigid and Structural
- Thermal Insulator
- Energy Absorbing
- Moisture Resistant
- Excellent Flatness
- Easy to Cut and Fabricate
- Easy to Paint and Glue

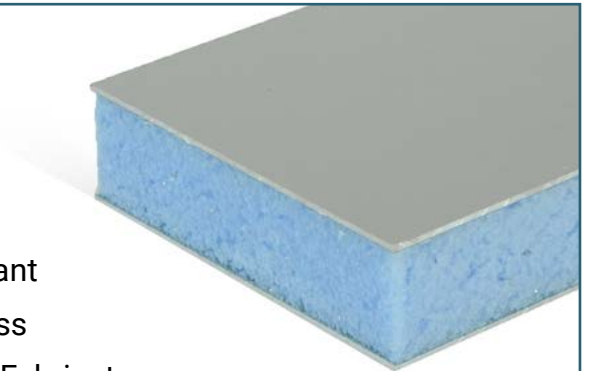

Skins

- 0.9mm Aluminum 3000 series (Preprimed)

Options

- 0.55mm – 3mm thick
- RAL 9016/9010 Painted
- RAL Colours (1000sqm MOQ)

Core

- XPS – Extruded Polystyrene – 30Kg/m³

Options

- EPS – Expanded Polystyrene – 30kg/m³
- PVC, PU, PET Foams in various densities

Panel Size Range

- 2500 x 1200mm / 2440 x 1220mm (Standard)
- Options: Up to 4000mm x 2000mm depending on skins
- Cut to size kits

Thickness Range

- 5mm to 100mm (Others on request)

Weight Range Guide (All panels made to order)

- 0.9ALI/10XPS/0.9ALI
5.5Kg/sqm@12mm
- 0.9ALI/23XPS/0.9ALI
5.8Kg/sqm@25mm
- 0.9ALI/48XPS/0.9ALI
6.5Kg/sqm@50mm

Typical Applications

- Lightweight Tooling Boards
- Lightweight Monocoque Chassis
- Lightweight Architectural Panels
- Lightweight Floor/Wall/Ceiling Panels
- Lightweight Flight Cases
- Lightweight Marine/Train Wall Panels
- Lightweight Ramps
- Lightweight Machine Covers

Minimum Order: 3 panels / 10sqm
All panels made to order: Typically 2-4 weeks lead time

